

# Keysight E5260A

## IV Analyzer/8 Slot High Speed Measurement Mainframe

Data Sheet





## Introduction

Keysight Technologies, Inc. E5260A IV Analyzer is the complete solution for current-voltage characterization of a wide range of materials and devices. The E5260A supports multiple SMUs (Source/Monitor Units) for voltage/current sourcing and voltage/current measurement with the best in the class current measurement performance as low as 5 pA. Its modular architecture allows you to configure or upgrade SMU modules for available eight slots. The EasyEXPERT group+ GUI based characterization software is furnished and available on your PC to support all the tasks required in the characterization from the measurement setup to the data analysis. Powerful integration of SMU's versatile measurement capabilities and GUI based characterization software makes the E5260A the best solution for characterization and evaluation of devices, materials, semiconductors, active/passive components, or virtually any other type of electronic device with uncompromised measurement reliability and efficiency.

Keysight EasyEXPERT group+ supports efficient and repeatable device characterization in the entire characterization process from measurement setup and execution to analysis and data management either by interactive manual operation or automation across a wafer in conjunction with a semiautomatic wafer prober. EasyEXPERT group+ makes it easy to perform current-voltage characterization immediately with the ready-to-use measurements (application tests) furnished, and allows you the option of storing test condition and measurement data automatically after each measurement in a unique built-in database (workspace), ensuring that valuable information is not lost and that measurements can be repeated at a later date. Keysight E5260A provides the complete solution for current-voltage characterization with these versatile capabilities.

In addition to using as an analyzer, the E5260A is available as a system component SMU for a rack and stuck test system. It provides the scalability and high throughput for current-voltage measurement. It can be controlled remotely by the FLEX command set supporting the powerful measurement capabilities.

## The Basic Features

### Current-voltage measurement capabilities

- Accurate and precision measurement ranges of 5 pA – 1A and 100  $\mu$ V – 200 V
- Spot and sweep measurement capabilities
- Pulse spot and sweep measurement with minimum 500  $\mu$ s pulse width

### EasyEXPERT group+ software

- Characterization environment is available on user's PC
- Intuitive GUI based operation with keyboard and mouse operation
- Application Test mode provides the furnished ready-to-use application tests for quick measurement execution (Available application tests can be adapted to configured resources.)
- Classic test mode provides easy access to the instrument features
- Graphical display and analysis capabilities facilitate front-end data analysis without additional utilities and support report generation as image data or Excel data.
- Individualized built-in database (workspace) records test data automatically and simplifies the data management without annoying numerous data files.
- Quick test mode supports test sequencing without programming
- GUI-based control of the Keysight B2200A, B2201A and E5250A switching matrices
- EasyEXPERT remote control function supports the remote execution of application tests via the LAN interface
- Data back capability and various data protection feature for shared usage by multiple users
- EasyEXPERT group+ can be installed on as many PCs as you need without additional charge to take advantage of offline personal analyzer environment among users in your department.

### E5260A hardware

- Configurable and upgradable measurement modules up to 8 slots
- Medium Power SMU (MPSMU) and High Power SMU (HPSMU) are available for configurable SMU selection.
- High-speed analog-to-digital converter (ADC) is available.
- Active ground unit (GNDU) in mainframe to force 0 V and sink the current up to 4 A
- Multiple interfaces (GPIB, trigger in/out and digital I/O)
- FLEX command set and program memory for remote control programming
- Self-test, self-calibration and diagnostics functions

## Hardware

### Specification conditions

The measurement and output accuracy are specified at the module connector terminals when referenced to the Zero Check terminal under the following conditions:

1. Temperature:  $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$   
(double for  $5^{\circ}\text{C}$  to  $18^{\circ}\text{C}$ , and  $28^{\circ}\text{C}$  to  $40^{\circ}\text{C}$  if not noted otherwise)
2. After 40 minutes warm-up
3. Ambient temperature change less than  $\pm 1^{\circ}\text{C}$  after auto calibration execution
4. Measurement made within one hour after auto calibration execution
5. Averaging (high-speed per-SMU ADC): 128 samples in 1 PLC; Integration time
6. Filter: ON (for SMUs)
7. Kelvin connection
8. Calibration period: 1 year

Note: This document lists specifications and supplemental information for the E5260A and its associated modules. The specifications are the standards against which the E5260A and its associated modules are tested. When the E5260A or any of its associated modules are shipped from the factory, they meet the specifications. The “supplemental” information and “typical” entries in the following specifications are not warranted, but provide useful information about the functions and performance of the instrument.

## E5260A Mainframe Specification

### Supported plug-in modules

The E5260A supports eight slots for plug-in modules.

Part number	Description	Slots occupied	Range of operation	Minimum resolution
E5290A	High speed HPSMU	2	-200 V to 200 V, -1 A to 1 A	100 $\mu\text{V}$ , 5 $\mu\text{A}$
E5291A	High speed MPSMU	1	-100 V to 100 V, -200 mA to 200 mA	100 $\mu\text{V}$ , 5 $\mu\text{A}$

### Maximum output power

The total module power consumption cannot exceed 80 W.

Note: Using the HPSMU and MPSMU units, it is impossible to create a combination that exceeds the 80-watt limit.

### Maximum voltage between common and ground

Maximum common to ground voltage must be  $\pm 42\text{ V}$

### Pulse measurement

Pulse width: 500  $\mu\text{s}$  to 2 s  
 Pulse period: 5 ms to 5 s  
 Period  $\geq$  width + 2 ms  
 (when width  $\leq$  100 ms)  
 Period  $\geq$  width + 10 ms  
 (when width  $>$  100 ms)  
 Pulse resolution: 100  $\mu\text{s}$

### Ground unit (GNDU) specification

The GNDU is furnished with the E5260A mainframe.

Output voltage:  $0\text{ V} \pm 100\ \mu\text{V}$   
 Maximum sink current: 4 A  
 Output terminal/connection:  
 Triaxial connector, Kelvin (remote sensing)

### GNDU supplemental information

Load capacitance: 1  $\mu\text{F}$

Cable resistance:  
 For  $I_s \leq 1.6\text{ A}$ :  
 Force line  $R < 1\ \Omega$   
 For  $1.6\text{ A} < I_s \leq 2.0\text{ A}$ :  
 Force line  $R < 0.7\ \Omega$   
 For  $2.0\text{ A} < I_s \leq 4.0\text{ A}$ :  
 Force line  $R < 0.35\ \Omega$   
 For all cases:  
 Sense line  $R \leq 10\ \Omega$

Where  $I_s$  is the current being sunk by the GNDU.

## MPSMU (Medium Power SMU) Module Specifications

### Voltage range, resolution, and accuracy (MPSMU)

Voltage range	Force resolution	Measure resolution	Force accuracy <sup>1</sup>	Measure accuracy <sup>1</sup>	Maximum current
±2 V	100 μV	100 μV	±(0.03 % + 900 μV)	±(0.03 % + 700 μV)	200 mA
±20 V	1 mV	1 mV	±(0.03 % + 4 mV)	±(0.03 % + 4 mV)	200 mA
±40 V	2 mV	2 mV	±(0.03 % + 7 mV)	±(0.03 % + 8 mV)	<sup>2</sup>
±100 V	5 mV	5 mV	±(0.04 % + 15 mV)	±(0.03 % + 20 mV)	<sup>3</sup>

- ± (% of output/measured value + offset voltage)
- 200 mA ( $V_o \leq 20$  V), 50 mA ( $20$  V <  $V_o \leq 40$  V),  $V_o$  is the output voltage in volts.
- 200 mA ( $V_o \leq 20$  V), 50 mA ( $20$  V <  $V_o \leq 40$  V), 20 mA ( $40$  V <  $V_o \leq 100$  V),  $V_o$  is the output voltage in volts.

### Current range, resolution, and accuracy (MPSMU)

Current range	Force resolution	Measure resolution <sup>4</sup>	Force accuracy <sup>1</sup>	Measure accuracy <sup>1,2</sup>	Maximum voltage
±100 nA	5 pA	5 pA	±(0.12 % + 50 pA + 5 pA x ( $V_o/25$ ))	±(0.1 % + 30 pA + 5 pA x ( $V_o/25$ ))	100 V
±1 μA	50 pA	50 pA	±(0.12 % + 400 pA + 50 pA x ( $V_o/25$ ))	±(0.1 % + 200 pA + 50 pA x ( $V_o/25$ ))	100 V
±10 μA	500 pA	500 pA	±(0.12 % + 5 nA + 500 pA x ( $V_o/25$ ))	±(0.1 % + 3 nA + 500 pA x ( $V_o/25$ ))	100 V
±100 μA	5 nA	5 nA	±(0.12 % + 40 nA + 5 nA x ( $V_o/25$ ))	±(0.1 % + 20 nA + 5 nA x ( $V_o/25$ ))	100 V
±1 mA	50 nA	50 nA	±(0.12 % + 500 nA + 50 nA x ( $V_o/25$ ))	±(0.1 % + 300 nA + 50 nA x ( $V_o/25$ ))	100 V
±10 mA	500 nA	500 nA	±(0.12 % + 4 μA + 500 nA x ( $V_o/25$ ))	±(0.1 % + 2 μA + 500 nA x ( $V_o/25$ ))	100 V
±100 mA	5 μA	5 μA	±(0.12 % + 50 μA + 5 μA x ( $V_o/25$ ))	±(0.1 % + 30 μA + 5 μA x ( $V_o/25$ ))	<sup>3</sup>
±200 mA	10 μA	10 μA	±(0.12 % + 100 μA + 10 μA x ( $V_o/50$ ))	±(0.1 % + 60 μA + 10 μA x ( $V_o/50$ ))	<sup>4</sup>

- ± (% of output/measured value + offset current A (fixed part determined by the output/measurement range + proportional part that is multiplied by  $V_o$ ))
- Round up below decimal point for the value of ( $V_o/25$ ) and ( $V_o/50$ )
- 100 V ( $I_o \leq 20$  mA), 40 V ( $20$  mA <  $I_o \leq 50$  mA), 20 V ( $50$  mA <  $I_o \leq 100$  mA),  $I_o$  is the output current in amps.
- 100 V ( $I_o \leq 20$  mA), 40 V ( $20$  mA <  $I_o \leq 50$  mA), 20 V ( $50$  mA <  $I_o \leq 200$  mA),  $I_o$  is the output current in amps.

### Power consumption (MPSMU)

#### Voltage source mode:


Voltage range	Power
2 V	20 x $I_c$ (W)
20 V	20 x $I_c$ (W)
40 V	40 x $I_c$ (W)
100 V	100 x $I_c$ (W)

Where  $I_c$  is the current compliance setting.

#### Current source mode:

Voltage compliance	Power
$V_c \leq 20$	20 x $I_o$ (W)
$20 < V_c \leq 40$	40 x $I_o$ (W)
$40 < V_c \leq 100$	100 x $I_o$ (W)

Where  $V_c$  is the voltage compliance setting and  $I_o$  is output current.

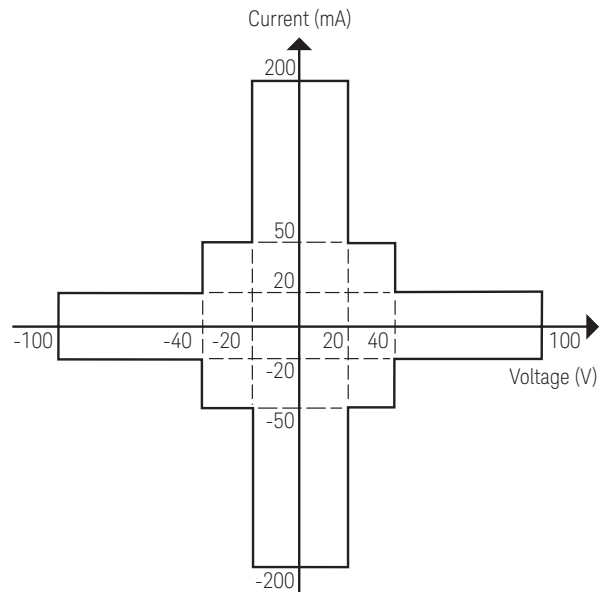

MPSMU measurement and output range

## Output terminal/connection:

Triaxial connector, Kelvin (remote sensing)

## Voltage/current compliance (limiting)

The SMU can limit output voltage or current to prevent damaging the device under test.

Voltage: 0 V to  $\pm 100$  V

Current:  $\pm 100$  pA to  $\pm 200$  mA

Compliance accuracy: Same as the current (or voltage) set accuracy.

## MPSMU supplemental information

Maximum allowable cable resistance (Kelvin connection):

Force Line:  $10 \Omega$  ( $I \leq 100$  mA)

Force Line:  $1.5 \Omega$  ( $100$  mA  $< I \leq 200$  mA)

Sense Line:  $10 \Omega$  (All cases)

Voltage source output resistance:  $0.3 \Omega$  typical (Force line, non-Kelvin connection)

Voltage measurement input resistance:  $\geq 10^{13} \Omega$

Current source output resistance:  $\geq 10^{13} \Omega$  (1 nA range)

Current compliance setting accuracy (for opposite polarity):

For 100 nA to 200 mA ranges: I setting accuracy  $\pm 2.5$  % of range

Maximum capacitive load:

For 100 nA to 10 mA ranges: 10 nF

For 100 mA to 200 mA ranges: 100  $\mu$ F

Maximum guard capacitance: 900 pF

Maximum shield capacitance: 5000 pF

Maximum guard offset voltage:  $\pm 1$  mV

Noise characteristics (typical, filter ON):

Voltage source: 0.01 % of V range (rms)

Current source: 0.1 % of I range (rms)

Overshoot (typical, filter ON):

Voltage source: 0.03 % of V range

Current source: 1 % of I range

Range switching transient noise (typical, filter ON):

Voltage ranging: 250 mV

Current ranging: 10 mV

Slew rate: 0.2 V/ $\mu$ s

SMU pulse setting accuracy (fixed measurement range):

Width: 0.5 % + 50  $\mu$ s

Period: 0.5 % + 100  $\mu$ s

Trigger out delay (pulsed measurements):

0 to 32.7 ms with 100  $\mu$ s resolution ( $<$  pulse width)

## HPSMU (High Power SMU) Module Specifications

### Voltage range, resolution, and accuracy (HPSMU)

Voltage range	Force resolution	Measure resolution	Force accuracy <sup>1</sup>	Measure accuracy <sup>1</sup>	Maximum current
$\pm 2$ V	100 $\mu$ V	100 $\mu$ V	$\pm(0.03 \% + 900 \mu\text{V})$	$\pm(0.03 \% + 700 \mu\text{V})$	1 A
$\pm 20$ V	1 mV	1 mV	$\pm(0.03 \% + 4 \text{ mV})$	$\pm(0.03 \% + 4 \text{ mV})$	1 A
$\pm 40$ V	2 mV	2 mV	$\pm(0.03 \% + 7 \text{ mV})$	$\pm(0.03 \% + 8 \text{ mV})$	2
$\pm 100$ V	5 mV	5 mV	$\pm(0.04 \% + 15 \text{ mV})$	$\pm(0.03 \% + 20 \text{ mV})$	3
$\pm 200$ V	10 mV	10 mV	$\pm(0.045 \% + 30 \text{ mV})$	$\pm(0.035 \% + 40 \text{ mV})$	4

1.  $\pm$  (% of output/measured value + offset voltage V)

2. 1 A ( $V_o \leq 20$  V), 500 mA ( $20 \text{ V} < V_o \leq 40$  V),  $V_o$  is the output voltage in volts.

3. 1 A ( $V_o \leq 20$  V), 500 mA ( $20 \text{ V} < V_o \leq 40$  V), 125 mA ( $40 \text{ V} < V_o \leq 100$  V),  $V_o$  is the output voltage in volts.

4. 1 A ( $V_o \leq 20$  V), 500 mA ( $20 \text{ V} < V_o \leq 40$  V), 125 mA ( $40 \text{ V} < V_o \leq 100$  V), 50 mA ( $100 \text{ V} < V_o \leq 200$  V),  $V_o$  is the output voltage in volts.

### Current range, resolution, and accuracy (HPSMU)

Current range	Force resolution	Measure resolution	Force accuracy <sup>1,2</sup>	Measure accuracy <sup>1,2</sup>	Maximum voltage
$\pm 100$ nA	5 pA	5 pA	$\pm(0.12 \% + 50 \text{ pA} + 5 \text{ pA} \times (V_o/25))$	$\pm(0.1 \% + 30 \text{ pA} + 5 \text{ pA} \times (V_o/25))$	200 V
$\pm 1$ $\mu$ A	50 pA	50 pA	$\pm(0.12 \% + 400 \text{ pA} + 50 \text{ pA} \times (V_o/25))$	$\pm(0.1 \% + 200 \text{ pA} + 50 \text{ pA} \times (V_o/25))$	200 V
$\pm 10$ $\mu$ A	500 pA	500 pA	$\pm(0.12 \% + 5 \text{ nA} + 500 \text{ pA} \times (V_o/25))$	$\pm(0.1 \% + 3 \text{ nA} + 500 \text{ pA} \times (V_o/25))$	200 V
$\pm 100$ $\mu$ A	5 nA	5 nA	$\pm(0.12 \% + 40 \text{ nA} + 5 \text{ nA} \times (V_o/25))$	$\pm(0.1 \% + 20 \text{ nA} + 5 \text{ nA} \times (V_o/25))$	200 V
$\pm 1$ mA	50 nA	50 nA	$\pm(0.12 \% + 500 \text{ nA} + 50 \text{ nA} \times (V_o/25))$	$\pm(0.1 \% + 300 \text{ nA} + 50 \text{ nA} \times (V_o/25))$	200 V
$\pm 10$ mA	500 nA	500 nA	$\pm(0.12 \% + 4 \mu\text{A} + 500 \text{ nA} \times (V_o/25))$	$\pm(0.1 \% + 2 \mu\text{A} + 500 \text{ nA} \times (V_o/25))$	200 V
$\pm 100$ mA	5 $\mu$ A	5 $\mu$ A	$\pm(0.12 \% + 50 \mu\text{A} + 5 \mu\text{A} \times (V_o/25))$	$\pm(0.1 \% + 30 \mu\text{A} + 5 \mu\text{A} \times (V_o/25))$	3
$\pm 1$ A	50 $\mu$ A	50 $\mu$ A	$\pm(0.5 \% + 500 \mu\text{A} + 50 \mu\text{A} \times (V_o/25))$	$\pm(0.5 \% + 300 \mu\text{A} + 50 \mu\text{A} \times (V_o/25))$	4

5.  $\pm$  (% of output/measured value + offset current A (fixed part determined by the output/measurement range + proportional part that is multiplied by  $V_o$ ))

6. Round up below decimal point for the value of  $(V_o/25)$ .

7. 200 V ( $I_o \leq 50$  mA), 100 V ( $50 \text{ mA} < I_o \leq 100$  mA)

8. 200 V ( $I_o \leq 50$  mA), 100 V ( $50 \text{ mA} < I_o \leq 125$  mA), 40 V ( $125 \text{ mA} < I_o \leq 500$  mA), 20 V ( $500 \text{ mA} < I_o \leq 1$  A),  $I_o$  is the output current in amps.

## Power consumption (HPSMU)

Voltage source mode:


Voltage range	Power
2 V	20 x I <sub>c</sub> (W)
20 V	20 x I <sub>c</sub> (W)
40 V	40 x I <sub>c</sub> (W)
100 V	100 x I <sub>c</sub> (W)
200 V	200 x I <sub>c</sub> (W)

Where I<sub>c</sub> is the current compliance setting.

Current source mode:

Voltage compliance	Power
V <sub>c</sub> ≤ 20	20 x I <sub>o</sub> (W)
20 < V <sub>c</sub> ≤ 40	40 x I <sub>o</sub> (W)
40 < V <sub>c</sub> ≤ 100	100 x I <sub>o</sub> (W)
100 < V <sub>c</sub> ≤ 200	200 x I <sub>o</sub> (W)

Where V<sub>c</sub> is the voltage compliance setting and I<sub>o</sub> is output current.

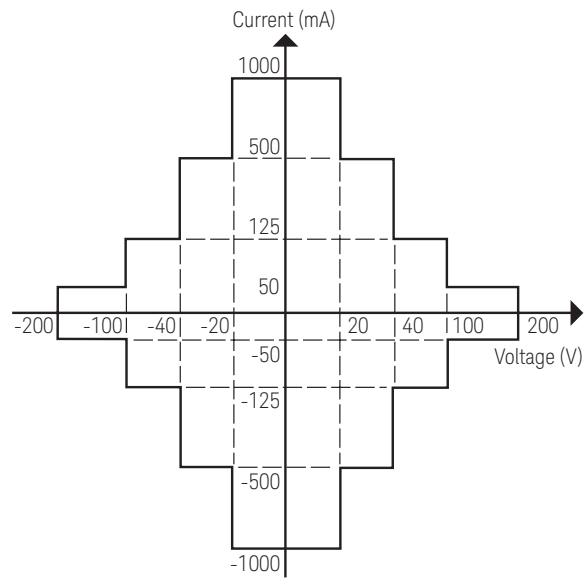

HPSMU measurement and output range

## Output terminal/connection:

Triaxial connector, Kelvin (remote sensing)

## Voltage/current compliance(limiting)

The SMU can limit output voltage or current to prevent damaging the device under test.

Voltage: 0 V to ± 200 V

Current: ± 100 pA to ± 1 A

Compliance accuracy: Same as the current (or voltage) set accuracy.

## HPSMU supplemental information

Maximum allowable cable resistance (Kelvin connection):

Force line: 10 Ω (I ≤ 100 mA)

Force line: 1.5 Ω (100 mA < I ≤ 1 A)

Sense line: 10 Ω (All cases)

Voltage source output resistance:

0.2 Ω typical (Force line, non-Kelvin connection)

Voltage measurement input resistance: ≥ 10<sup>13</sup> Ω

Current source output resistance: ≥ 10<sup>13</sup> Ω (1 nA range)

Current compliance setting accuracy (for opposite polarity):

For 1 nA to 10 nA ranges: I setting accuracy ± 12 % of range

For 100 nA to 1 A ranges: I setting accuracy ± 2.5 % of range

Maximum capacitive load:

For 100 nA to 10 mA ranges: 10 nF

For 100 mA to 1 A ranges: 100 μF

Maximum guard capacitance: 900 pF

Maximum shield capacitance: 5000 pF

Maximum guard offset voltage: ± 1 mV

Noise characteristics (typical, filter ON):

Voltage source: 0.01 % of V range (rms)

Current source: 0.1 % of I range (rms)

Overshoot (typical, filter ON):

Voltage source: 0.03 % of V range

Current source: 1 % of I range

Range switching transient noise (typical, filter ON):

Voltage ranging: 250 mV

Current ranging: 10 mV

Slew rate: 0.2 V/μs

SMU pulse setting accuracy (fixed measurement range):

Width: 0.5 % + 50 μs

Period: 0.5 % + 100 μs

Trigger out delay (pulsed measurements):

0 to 32.7 ms with 100 μs resolution (< pulse width)

## Functions

### Front panel operations

#### Display

- Display error messages
- Display spot measurement set value
- Display spot measurement result

#### Keypad operations

- Set GPIB address
- Set local/remote mode
- Select measurement channel
- Set spot measurement set value
- Start calibration/diagnostics

## MPSMU and HPSMU Measurement Mode Details

### Spot measurement mode

Outputs and measures voltage and current.

### Staircase sweep measurement mode

Outputs swept voltage or current, and measures dc voltage or current. One channel can sweep current or voltage while up to eight channels can measure current or voltage. A second channel can be synchronized with the primary sweep channel as an additional voltage or current sweep source. Linear or log sweeps can be performed.

Number of steps: 1 – 1,001

Hold time: 0 – 655.35 s, 1 ms resolution

Delay time: 0 – 65.5350 s, 100  $\mu$ s resolution

### Multi-channel sweep measurement mode

Outputs swept voltage or current, and measures dc voltage or current. Up to eight channels can sweep current or voltage and up to eight channels can measure current or voltage. Linear or log sweeps can be performed.

Number of steps: 1– 1,001

Hold time: 0 – 655.35 s, 1 ms resolution

Delay time: 0 – 65.5350 s, 100  $\mu$ s resolution

### Pulsed spot measurement mode

Outputs a voltage or current pulse and measures dc voltage or current.

Pulse width: 500  $\mu$ s to 100 ms, 100  $\mu$ s resolution

Pulse period: 5 ms to 1 s ( $\geq$  pulse width + 4 ms), 100  $\mu$ s resolution

Maximum pulse duty: 50 %

### Pulsed sweep measurement mode

Outputs pulsed swept voltage or current, and measures dc voltage or current. A second channel can be programmed to output a staircase sweep voltage or current synchronized with the pulsed sweep output.

### Staircase sweep with pulsed bias measurement mode

Outputs swept voltage or current, and measures dc voltage or current. A second channel can be programmed to output a pulsed bias voltage or current. A third channel can be synchronized with the primary sweep channel as an additional voltage or current sweep source.

### Quasi-pulsed spot measurement mode

Outputs quasi-pulsed voltage and measures dc voltage or current.

### Linear search measurement mode

Outputs and measure voltage or current by using linear search method.

### Binary search measurement mode

Outputs and measure voltage or current by using binary search method.

## Time Stamp

The E5260A supports a time stamp function utilizing an internal quartz clock.

Resolution: 100  $\mu$ s

## Program Memory

The E5260A mainframe contains (volatile) memory that can be used to increase test measurement throughput. Program memory allows the storage of program code in the E5260A, eliminating the need to communicate over the GPIB interface. In addition, input data can be passed to code sequences stored in program memory.

Maximum lines of storable code: 40,000

Maximum number of program sequences: 2,000

## Output Data Buffer

The number of data points that can be stored in the data buffer varies with the choice of the output data format.

Minimum number of storable data Points: 34,034

## Trigger I/O

Trigger in/out synchronization pulses before and after setting and measuring dc voltage and current. Arbitrary trigger events can be masked or activated independently.



## Input

An external trigger input signal can be used to do any of the following:

1. Start a measurement
2. Start a measurement at each sweep step for a staircase sweep or multi channel sweep measurement
3. Start the source output at each sweep step for a staircase sweep, pulsed sweep, staircase sweep with pulsed bias, or multi-channel sweep measurement.
4. Start the pulsed output for a pulsed spot measurement.
5. Recover from a wait state.

Input level: TTL level, negative or positive edge trigger, or TTL level, negative or positive gate trigger.

## Output

An output trigger signal can be sent when one of the following events occurs:

1. The end of a measurement is reached.
2. The end of a measurement at each sweep step for a staircase sweep or multi-channel sweep measurement is reached.
3. Completion of the source output setup at each sweep step for a staircase sweep, pulsed sweep, staircase sweep with pulsed bias, or multi-channel sweep measurement.
4. Completion of the pulsed output setup for a pulsed spot measurement.
5. A trigger command is issued.

Output level: TTL level, negative or positive edge trigger, or TTL level, negative or positive gate trigger.

## General Purpose Digital I/O

16 general-purpose digital I/O signals are available via a 25-pin DIN connector. These pins can be used as an alternative to the BNC trigger-in and trigger-out lines to synchronize the E5260A with other instruments. They can also be used as output and input ports for digital signals. The user can selectively assign pins to trigger mode or digital I/O mode.

## General Specifications

### Temperature range

Operating: +5°C to +40°C  
Storage: -20°C to +60°C

### Humidity range

Operating: 15 % to 80 % RH, non-condensing  
Storage: 5 % to 90 % RH, non-condensing

## Altitude

Operating: 0 m to 2,000 m (6,561 ft)  
Storage: 0 m to 4,600 m (15,092 ft)

## Power requirement

AC voltage: 90 V to 264 V  
Line frequency: 47 Hz to 63 Hz

## Maximum volt-amps (VA)

E5260A: 600 VA

## Regulatory compliance

EMC: IEC61326-1/EN61326-1  
AS/NZS CISPR 11  
KC: RRA Notification amending Radio Waves Act Article 58-2  
Safety: IEC61010-1/EN61010-1  
CAN/CSA-C22.2 No. 61010-1-12, C/US

## Certification

CE, CSA, RCM ,KC

## Dimensions

E5260A: 426 mm W x 235 mm H x 575 mm D

## Weight

E5260A mainframe only: 17 kg  
E5290A HPSMU: 2.5 kg  
E5291A MPSMU: 1.4 kg

## Furnished Accessories

- USB-GPIB interface (Keysight 82357B)
- GNDU to Kelvin adaptor (Keysight N1254A-100)
- Triaxial cables for SMU
- Triaxial cable for GNDU
- Interlock cable
- CD-ROMs (EasyEXPERT install media, and VXI *plug&play* driver)

## Furnished Software

- EasyEXPERT group+  
See the following section for features and prerequisites.
- VXI *plug&play* driver  
Supported OS: Windows 7 Professional (SP1, 32 bit or 64 bit)

## Keysight EasyEXPERT group+ Software

Keysight EasyEXPERT group+ GUI based characterization software is available on your PC to accelerate the characterization tasks. It supports efficient and repeatable device characterization in the entire characterization process from measurement setup and execution to analysis and data management either by interactive manual operation or automation across a wafer in conjunction with a semiautomatic wafer prober. EasyEXPERT group+ makes it easy to perform complex device characterization immediately with the ready-to-use measurements (application tests) furnished, and allows you the option of storing test condition and measurement data automatically after each measurement in a unique built-in database (workspace), ensuring that valuable information is not lost and that measurements can be repeated at a later date. Finally, EasyEXPERT has built-in analysis capabilities and a graphical programming environment that facilitate the development of complex testing algorithms.

### Key features

- Multiple measurement modes for quick setup and measurement execution (application test, classic test, and quick test)
- Graphical display, automated analysis capabilities and data generation to Excel and image for analysis and reporting
- Built-in database (workspace) records test data automatically and simplifies the data management without numerous data files
- GUI-based control of the Keysight B2200A, B2201A and E5250A switching matrices
- EasyEXPERT remote control function supports the remote measurement execution of application tests that are created on GUI interactively, via the LAN interface
- Data back capability and various data protection feature for shared usage by multiple users
- Characterization environment is available on user's PC as a personal and portable analyzer environment. EasyEXPERT group+ can be installed on any PC as many as needed without additional charge.

### Application library

EasyEXPERT group+ comes with the application tests conveniently organized by device type, application, and technology. You can easily edit and customize the furnished application tests to fit your specific needs. Application tests are provided for the following categories; they are subject to change without notice.

Device Type	Application Tests
CMOS Transistor	Id-Vg, Id-Vd, Vth, breakdown, etc.
Bipolar Transistor	Ic-Vc, diode, Gummel plot, breakdown, hfe, etc.
Discrete device	Id-Vg, Id-Vd, Ic-Vc, diode, etc.
Power device	Pulsed Id-Vg, pulsed Id-Vd, breakdown, etc.
Nano Device	Resistance, Id-Vg, Id-Vd, Ic-Vc, etc.
Reliability test	NBTI/PBTI, electro migration, hot carrier injection, J-Ramp, TDDB, etc.

## Measurement modes and functions

### Operation Mode

#### Application test mode

The application test mode provides application oriented point-and-click test setup and execution. An application test can be selected from the library by device type and desired measurement, and then executed after modifying the default input parameters as needed. Available application tests can be adapted to configured resources.

#### Classic test mode

The classic test mode provides easy access to the instrument setup and measurement execution capabilities.

#### Tracer test mode

The tracer test mode offers intuitive and interactive sweep control using a rotary knob similar to a curve tracer. Just like an analog curve tracer, you can sweep in only one direction (useful for R&D device analysis) or in both directions (useful in failure analysis applications). Test set ups created in tracer test mode can be seamlessly and instantaneously transferred to classic test mode for further detailed measurement and analysis.

#### Quick test mode

A GUI-based Quick Test mode enables you to perform test sequencing without programming. You can select, copy, rearrange and cut-and-paste any application tests with a few simple mouse clicks. Once you have selected and arranged your tests, simply click on the measurement button to begin running an automated test sequence.

### Other measurement characteristics

#### Measurement control

Single, repeat, append, and stop

#### SMU setting capabilities

Limited auto ranging, voltage/current compliance, power compliance, automatic sweep abort functions, self-test, and self-calibration

#### Standby mode

SMUs in “Standby” remain programmed to their specified output value even as other units are reset for the next measurement.

#### Bias hold function

This function allows you to keep a source active between measurements. The source module will apply the specified bias between measurements when running classic tests inside an application test, in quick test mode, or during a repeated measurement. The function ceases as soon as these conditions end or when a measurement that does not use this function is started.

#### Current offset cancel

This function subtracts the offset current from the current measurement raw data, and returns the result as the measurement data. This function is used to compensate the error factor (offset current) caused by the measurement path such as the measurement cables, manipulators, or probe card.

## Data display, analysis and arithmetic functions

### Data Display

#### X-Y graph plot

X-axis and up to eight Y-axes, linear and log scale, real time graph plotting.

Scale: Auto scale and zoom

Marker: Marker to min/max, interpolation, direct marker, and marker skip

Cursor: Direct cursor

Line: Two lines, normal mode, grad mode, tangent mode, and regression mode

Overlay graph comparison: Graphical plots can be overlaid.

#### List display

Measurement data and calculated user function data are listed in conjunction with sweep step number or time domain sampling step number. Up to 20 data sets can be displayed.

#### Data variable display

Up to 20 user-defined parameters can be displayed on the graphics screen.

#### Automatic analysis function

On a graphics plot, the markers and lines can be automatically located using the auto analysis setup. Parameters can be automatically determined using automatic analysis, user function, and read out functions.

#### Analysis functions

Up to 20 user-defined analysis functions can be defined using arithmetic expressions.

Measured data, pre-defined variables, and read out functions can be used in the computation, and the result can be displayed.

#### Read out functions

The read out functions are built-in functions for reading various values related to the marker, cursor, or line.

#### Data export

X-Y graph plot can be printed or stored as image data to clipboard or mass storage device. (File type: bmp, gif, png, emf). Graph and list data can be exported to Excel.

## Arithmetic functions

### User functions

Up to 20 user-defined functions can be defined using arithmetic expressions.

Measured data and pre-defined variables can be used in the computation. The results can be displayed on the LCD.

### Arithmetic operators

+, -, \*, /, ^, abs (absolute value), at (arc tangent), avg (averaging), cond (conditional evaluation), delta, diff (differential), exp (exponent), integ (integration), lgt (logarithm, base 10), log (logarithm, base e), mavg (moving average), max, min, sqrt, trigonometric function, inverse trigonometric function, and so on.

### Physical constants

Keyboard constants are stored in memory as follows:

q: Electron charge, 1.602177E-19 C

k: Boltzman's constant, 1.380658E-23

$\epsilon$  (e): Dielectric constant of vacuum, 8.854188E-12

### Engineering units

The following unit symbols are also available on the keyboard:

a (10-18), f (10-15), p (10-12), n (10-9),

u or  $\mu$  (10-6), m (10-3), k (103), M (106),

G (109), T (1012), P (1015)

## Data management

### Workspace (Built-in database)

EasyEXPERT group+ supports the built-in database called "workspace". Workspaces are created on a HDD, and they enable to manage and access all the measurement related data without handling numerous files. Every workspace supports the following features:

- Access to measurement capabilities and data stored in the workspace.
- Save/Import/Export measurement settings and data (application library, measurement settings, my favorite setup, and measurement data)
- Recall the setup for measurement reproduction and data for analysis

### Data auto record/auto export

EasyEXPERT group+ has the ability to automatically store the measurement setup and data within a workspace. It can also export measurement data in real time, in a variety of formats such as Excel (xls).

### Import/export files

File type:

Keysight EasyEXPERT format, XML-SS format, CSV format

### Data Protection

EasyEXPERT group+ has various options to protect important data as follows.

- Password protection (workspace, test definition and my favorite)
- User level access control (engineer mode/operator mode)

### Workspace back-up and portability

EasyEXPERT group+ has the ability to import/export a workspace for back-up and portability.

## EasyEXPERT group+ supported instruments and prerequisites

### Supported instruments and features

		Precision Current - Voltage Analyzer Series					Discontinued
		Advanced Device Analyzer		Precision IV Analyzer		Economic IV Analyzer	
		B1500A	B1505A	E5270B	E5262/63A E5260A	B2900A Series SMU	4155B/C 4156B/C
<b>Classic Test</b>	I/V Sweep	Yes	Yes	Yes	Yes	Yes	Yes <sup>1</sup>
	Multi-ch I/V Sweep	Yes	Yes	Yes	Yes	Yes	-
	I/V List Sweep	Yes	Yes	Yes	Yes	Yes	-
	I/V-t Sampling	Yes	Yes	-	-	Yes	Yes
	C-V Sweep	Yes	Yes	-	-	-	-
	SPGU Control	Yes	-	-	-	-	-
	GUI based switching matrix control	Yes <sup>2</sup>	-	Yes <sup>2</sup>	Yes <sup>2</sup>	Yes <sup>2</sup>	Yes <sup>2</sup>
	Direct Control	Yes	Yes	-	-	-	-
<b>Application Test</b>		Yes	Yes	Yes	Yes	Yes	Yes
<b>Tracer Test</b>		Yes (DC/Pulse)	Yes (DC/Pulse)	Yes (DC)	Yes (DC)	Yes (DC/Pulse)	-
<b>Quick Test</b>		Yes	Yes	Yes	Yes	Yes	Yes
<b>Oscilloscope view</b>		Yes <sup>3</sup>	Yes <sup>3</sup>	-	-	-	-
<b>External instrument driver support</b>	LCR meter (4284A/E4980A)	Yes	Yes	Yes	Yes	Yes	Yes
	Pulse Generator (81110A)	Yes	Yes	Yes	Yes	Yes	Yes
	DVM (3458A)	Yes	Yes	Yes	Yes	Yes	Yes
<b>Prober control in Quick Test mode</b>		Yes <sup>4</sup>	Yes <sup>4</sup>	Yes <sup>4</sup>	Yes <sup>4</sup>	Yes <sup>4</sup>	Yes <sup>4</sup>
<b>Firmware requirement</b>		A.04.00 or later <sup>5</sup>	A.04.00 or later <sup>5</sup>	B.01.10 or later	B.01.10 or later	1.0 or later	HOSTC: 03.08 or later SMUC: 04.08 or later

1. PGU and VSU/VMU are supported. Differential voltage measurement of VMU is not supported.

2. B2200/01A and E5250A (with E5252A cards) are supported

3. Only available for supported modules.

4. Cascade Microtech Summit 12000/S300 (Nucleus), Cascade Microtech (Suss MicroTec) PA200/PA300, and Vector Semiconductor VX-2000/VX-3000

5. The latest firmware version is strongly recommended to take full advantage of measurement capabilities.

## Prerequisites

Prerequisites to use the EasyEXPERT group+ on an external PC are as follows.

Operating system and service pack	Microsoft Windows Vista Business SP2 or later (32bit)	Microsoft Windows 7 Professional SP1 or later (32bit/64bit)	Microsoft Windows 8.1 Professional or later (32bit/64bit)	Microsoft Windows 10 Pro or later (32bit/64bit)
<b>Processor</b>	Vista certified PC	Windows 7 certified PC	Windows 8.1 certified PC	Windows 10 certified PC
<b>Supported language</b>	English (US)	English (US)	English (US)	English (US)
<b>Memory</b>	2 GB memory	2 GB memory	2 GB memory	2 GB memory
<b>Display</b>	XGA 1024 x 768 (SXGA 1280 x 1024 recommended)	XGA 1024 x 768 (SXGA 1280 x 1024 recommended)	XGA 1024 x 768 (SXGA 1280 x 1024 recommended)	XGA 1024 x 768 (SXGA 1280 x 1024 recommended)
<b>HDD</b>	Installation: 1GB free disk space on the C drive	Installation: 1GB free disk space on the C drive	Installation: 1GB free disk space on the C drive	Installation: 1GB free disk space on the C drive
	Test setup / result data storage: Free disk space more than 30GB is recommended	Test setup / result data storage: Free disk space more than 30GB is recommended	Test setup / result data storage: Free disk space more than 30GB is recommended	Test setup / result data storage: Free disk space more than 30GB is recommended
<b>.NET Framework</b>	Microsoft .NET Framework 3.5 SP1	Microsoft .NET Framework 3.5 SP1	Microsoft .NET Framework 3.5 SP1	Microsoft .NET Framework 3.5 SP1
<b>IO Libraries</b>	Keysight IO Libraries Suite 16.2, 16.3, 17.1 update 1 or later (for the Online execution mode)	Keysight IO Libraries Suite 16.2, 16.3, 17.1 update 1 or later (for the Online execution mode)	Keysight IO Libraries Suite 16.2, 16.3, 17.1 update 1 or later (for the Online execution mode)	Keysight IO Libraries Suite 17.1 update 1 or later (for the Online execution mode)

## Recommended GPIB I/F

			E5270B E5260A E5262/63A
		Interface	
Keysight	82350B/C	PCI	✓
	82351B	PCIe	✓
	82537A/B	USB	✓
National Instruments	GPIB-USB-HS	USB	✓

## Measurements Modes

Following table shows the measurement modes supported by the EasyEXPERT group+ and FLEX remote command set.

IV Measurement features	EasyEXPERT group+	Command based programming (FLEX command set)
Spot measurement	Yes	Yes
Pulsed spot measurement	Yes	Yes
Staircase sweep	Yes	Yes
Pulsed sweep	Yes	Yes
Staircase sweep with pulsed bias	Yes	Yes
Multi-channel sweep	Yes	Yes
List Sweep	Yes	-
Quasi-pulsed spot	-	Yes
Linear search	-	Yes
Binary search	-	Yes

## Ordering Information

Model	
E5260A	IV Analyzer/8 Slot High Speed Measurement Mainframe
E5260A contains triax cables for GNDU and SMU, the GNDU to Kelvin adapter, USB-GPIB interface and the EasyEXPERT group+ software install media.	
Cable length options	
E5260A-015	1.5m cable length
E5260A-030	3.0m cable length
Quick configuration options	
E5260A-A01	Four MPSMU package
Add-on module options	
E5260A-A10	Add one HPSMU
E5260A-A11	Add one MPSMU

## Upgrade Product

Model	
E5260AU	Upgrade kit for E5260A
Module upgrade options	
E5260AU-090	High Speed High Power Source/Monitor Unit Module (E5290A)/ No cable included
E5260AU-091	High Speed Medium Power Source/Monitor Unit Module (E5291A)/ No cable included
EasyEXPERT upgrade option	
E5260AU-SWS	EasyEXPERT Extension support

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.  
 From Hewlett-Packard to Agilent to Keysight.



For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-9-7-17)

**DEKRA Certified**  
 ISO 9001 Quality Management System

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
 Keysight Technologies, Inc.  
 DEKRA Certified ISO 9001:2015  
 Quality Management System

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

Accelerate Technology Adoption.  
 Lower costs.

#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

Keysight Precision Current-Voltage Analyzer Series and Power Device Analyzer Series  
[www.keysight.com/find/analyzer](http://www.keysight.com/find/analyzer)